

GENERAL LOCK

— DEADBOLTS —

INDEX:

Grade 1 D660 Series Deadbolt

Applications	B:1
Standard Features	B:1
Functions	B:1

Grade 2 D160 Series Deadbolt

Applications	B:2
Standard Features	B:2
Functions	B:2

Grade 3 D360 Series Residential Deadbolt

Applications	B:3
Standard Features	B:3
Functions	B:3

How to Order - Nomenclature

Deadbolts	B:4
-----------------	-----

Deadbolt Components

	B:5
--	-----

TERMS AND CONDITIONS:

Copyright: © 2011 General Lock LLC. All text, graphics, photographs, and any selection, coordination, and arrangement of such materials contained herein is copyrighted and owned by General Lock. No material from this catalog may be copied, reproduced, republished, uploaded, posted, transmitted, or distributed in any way unless permission has been expressly granted by General Lock and any reproduction of this catalog, in whole or in part, and/or any information or materials contained in it is prohibited without the express authorization of General Lock. General Lock is a trademark or registered trademark of General Lock. ANY MATERIALS OR INFORMATION PROVIDED BY GENERAL LOCK IN THIS CATALOG IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. GENERAL LOCK ASSUMES NO RESPONSIBILITY FOR ERRORS OR OMISSIONS IN THIS CATALOG, OR OTHER PUBLICATION OR OTHER DOCUMENTS, WHICH ARE REFERENCED BY THIS PUBLICATION.

All other brand names or product names, including Arrow, Best, Corbin-Russwin, Falcon, Kwikset, KSP, Sargent, Schlage, Weiser, and Yale, referenced herein are trademarks, registered trademarks, service marks, or trade names of the respective manufacturers of such products and are owned by their respective holders.

General Lock reserves the right to make changes in designs and specifications, to make addition or improvements on its products or to discontinue products without incurring any obligation. General Lock is not responsible for modification, addition or alteration to our products by others. Products may not appear as shown.

General Lock warrants only to Buyer that the products will be free from defects in material and workmanship for a period of 12 months from the date of shipment of the products unless a longer period is specified. This warranty does not cover wear and tear and shall be ineffective and shall not apply to products that have been subjected to misuse or abuse, neglect, accident, damage, or improper installation, or maintenance. Buyer's sole and exclusive remedy under these warranties will be limited to, at General Lock's sole option and expense, refund of the purchase price of, or the repair or replacement for of, the products or parts thereof which General Lock reasonably determines do not conform with these warranties. Buyer will inspect the products upon delivery and will promptly notify General Lock in writing of any defect in the products.


DISCLAIMER OF WARRANTIES: THE FOREGOING WARRANTIES ARE EXCLUSIVE AND IN LIEU OF, AND GENERAL LOCK DISCLAIMS AND BUYER WAIVES, ALL OTHER WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND OF ANY OTHER TYPE, WHETHER EXPRESS OR IMPLIED, ARISING BY LAW (STATUTORY OR OTHERWISE) AND WHETHER OR NOT OCCASIONED BY GENERAL LOCK'S NEGLIGENCE.

LIMITATION OF LIABILITY: IN NO EVENT SHALL GENERAL LOCK BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, PUNITIVE, OR CONSEQUENTIAL DAMAGES, INCLUDING ANY DAMAGES OCCASIONED BY GENERAL LOCK'S NEGLIGENCE. IN ADDITION, GENERAL LOCK'S LIABILITY ON ANY CLAIMS FOR DAMAGES OR CLAIMS ARISING OUT OF OR CONNECTED WITH THIS AGREEMENT OR THE SALE, DELIVERY OR USE OF THE PRODUCTS SHALL NOT EXCEED THE PURCHASE PRICE OF THE PRODUCTS AND/OR SERVICES DELIVERED.

Grade 1 D660 Series Deadbolt

APPLICATIONS:

The D660 Series is a super heavy-duty deadbolt that provides an outstanding combination of performance, security, and value. The D660 is ideal for heavy-duty commercial applications including high-traffic doors in hospitals, schools, hotels, restaurants, and government buildings.

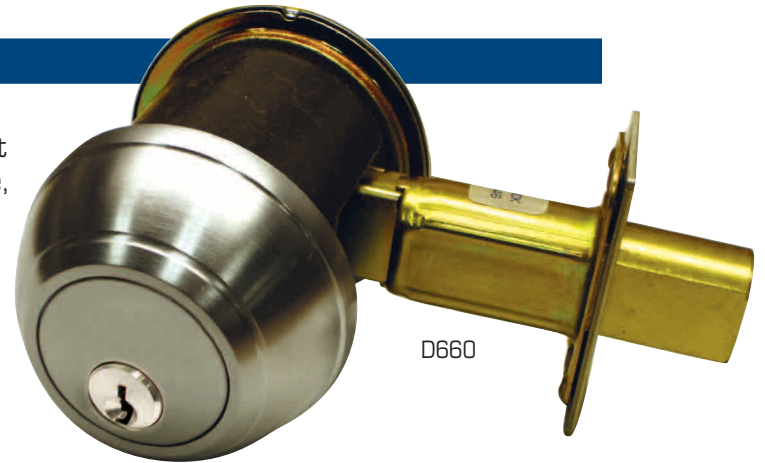

STANDARD FEATURES:

CERTIFICATIONS: ANSI A156.2 Grade 1, UL Listed 3-hr, ADA and title 19 California Fire Marshal.



MECHANISM: Internal security chassis. Features a zinc security installation cage.

DOOR THICKNESS: 1-9/16" to 2" for standard prep and for SFIC prep

BACKSET: 2-3/4"

STRIKE: 2-3/4" x 1-1/8" square solid steel reinforced strike plate with 3" installation screws

BOLT: Hardened steel, saw resistant roller housed within the bolt 1" throw

CYLINDER: Drilled 6, pinned 6 solid brass cylinder with Schlage keyway, keyed differently, 2 cut keys

SFIC CORE: Prepped for either 6-pin or 7-pin SFIC core.

CASE QTY: 12

FUNCTIONS:



SINGLE CYLINDER DEADBOLT - Deadbolt thrown or retracted by key on the outside or by inside turn unit. Bolt automatically deadlocks when fully thrown.



DOUBLE CYLINDER DEADLOCK - Deadbolt thrown or retracted by key on either side. Bolt automatically deadlocks when fully thrown.

GENERAL LOCK


Quality & Value™

— Product Guide 105.0 — B:1

Grade 2 D160 Series Deadbolt

APPLICATIONS:

The D160 Series is a medium-duty commercial deadbolt which provides an outstanding combination of performance and value. The D160 is ideal for medium-duty commercial applications including office buildings, hospitals, schools, hotels, restaurants, nursing homes, apartments, and retail complexes.

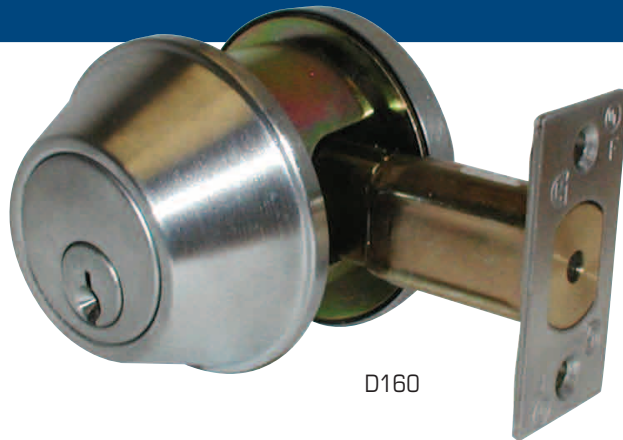

D160

STANDARD FEATURES:

CERTIFICATIONS: ANSI A156.2 Grade 2, UL Listed 3-hr, ADA and title 19 California Fire Marshal.



DOOR THICKNESS: 1-3/8" to 1-3/4" for standard prep
1-9/16" to 2" for SFIC prep

BACKSET: 6-way adjustable to 2-3/8" or 2-3/4" square corner, radius corner, drive-in bolt"

STRIKE: 2-3/4" x 1-1/8" square solid steel reinforced strike plate with 3" installation screws

BOLT: Hardened steel, saw resistant roller housed within the bolt 1" throw

CYLINDER: Drilled 6, pinned 6 solid brass cylinder with Schlage keyway, keyed differently, 2 cut keys

SFIC CORE: Prepped for either 6-pin or 7-pin SFIC core.

CASE QTY: 20

FUNCTIONS:

SINGLE CYLINDER DEADBOLT - Deadbolt thrown or retracted by key on the outside or by inside turn unit. Bolt automatically deadlocks when fully thrown.

DOUBLE CYLINDER DEADLOCK - Deadbolt thrown or retracted by key on either side. Bolt automatically deadlocks when fully thrown.


GENERAL LOCK

Quality & Value™

Grade 3 D360 Series Residential Deadbolt

APPLICATIONS:

The D360 is a light-duty commercial and high-end residential deadbolt suitable for interior and exterior doors of office buildings, hotel / motel, storefronts, multi-family housing, condominiums, and apartments.

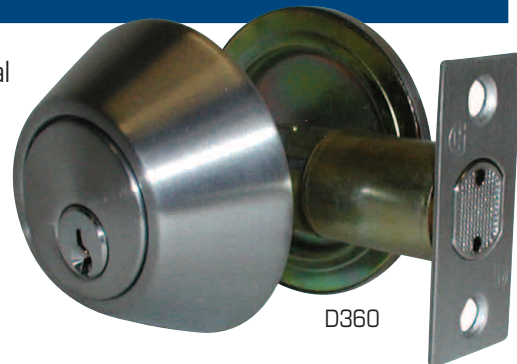

STANDARD FEATURES:

CERTIFICATIONS: ANSI A156.2 Grade 3.

DOOR THICKNESS: 1-3/8" to 1-3/4" Retrofits door from 1-1/2" to 2-1/8" cross bore for flexible mounting

BACKSET: Adjustable 2-3/8" to 2-3/4", Square corner

STRIKE: 2-1/4" x 1"

BOLT: Solid steel bolt 1" throw

CYLINDER: Drilled 5, pinned 5 solid brass cylinder and housing with Schlage and Kwikset keyway, keyed differently, 2 cut keys"

CASE QTY: 30

FUNCTIONS:



SINGLE CYLINDER DEADBOLT - Deadbolt thrown or retracted by key on the outside or by inside turn unit. Bolt automatically deadlocks when fully thrown.



DOUBLE CYLINDER DEADLOCK - Deadbolt thrown or retracted by key on either side. Bolt automatically deadlocks when fully thrown.

GENERAL LOCK


Quality & Value™

— Product Guide 105.0 — B:3

Deadbolts

How to Order - Nomenclature

D 16 O 626 234 C

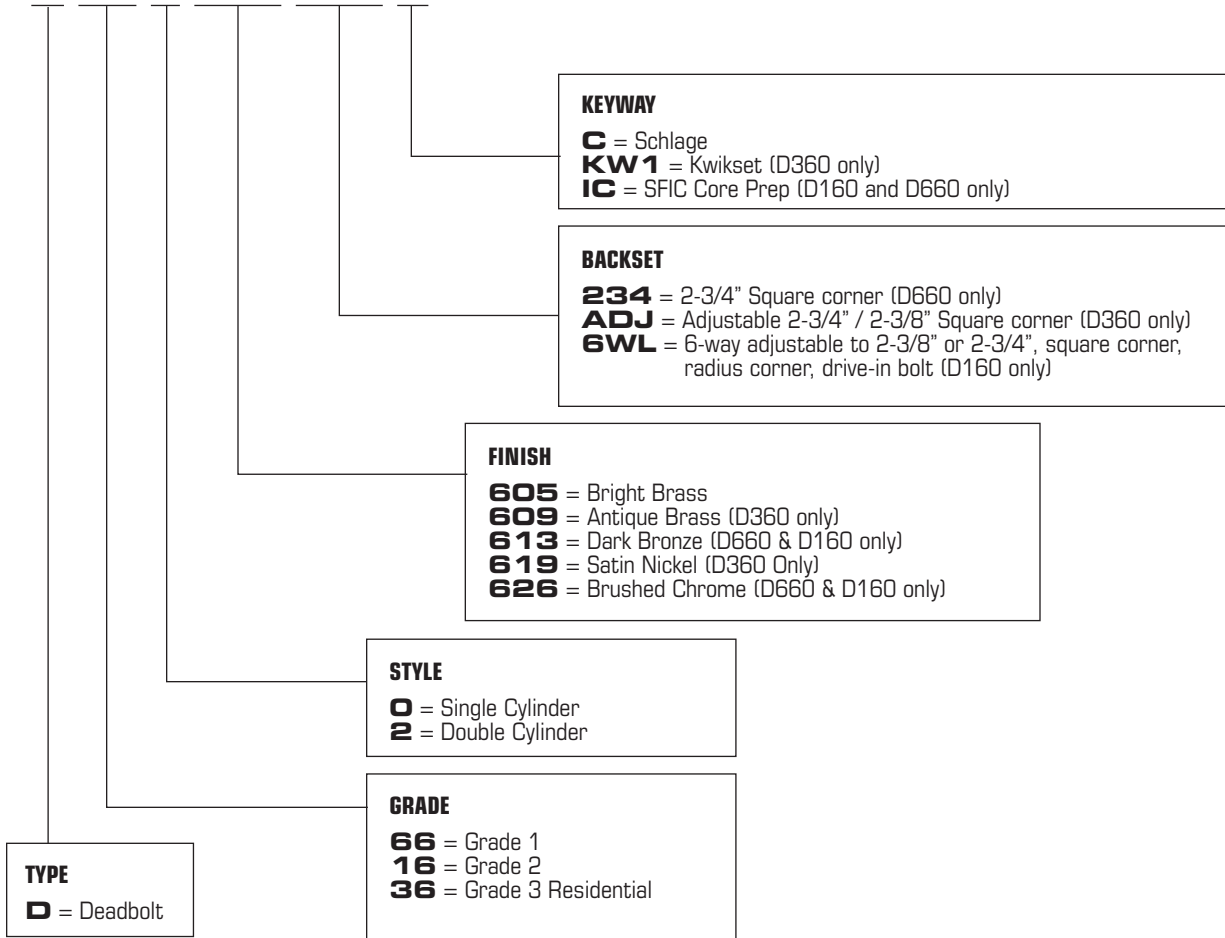

Deadbolt Components

COMPONENTS:

BOLT ONLY

For D660

	Description	Part Number	Finish
Fixed 2-3/8"	Fixed 2-3/8" square-corner bolt	DB-238 xxx	Specify
Fixed 2-3/4"	Fixed 2-3/4" square-corner bolt	DB-234 xxx	Specify

For D160

6-way adj	6-way adjustable to 2-3/8" or 2-3/4", square corner, radius corner, drive-in bolt	DB-6WL xxx	Specify
-----------	---	------------	---------

For D360

Adjustable	Adjustable to 2-3/8" or 2-3/4", square corner	3DTD xxx ADJ	Specify
------------	---	--------------	---------

GENERAL LOCK

Quality & Value™

— Product Guide 105.0 — B:5