


INSTALLATION	STEP 3	STEP 4
<p><b>STEP 1</b></p> <ol style="list-style-type: none"> <li>1. PREPARE STILE AS SHOWN.</li> <li>2. INSERT BINDER POST THRU .265 DIA. HOLE IN STILE.</li> <li>3. SECURE BINDER POST WITH 1/4-28 NUT.</li> </ol>	<p><b>STEP 2</b></p> <ol style="list-style-type: none"> <li>1. INSTALL DEADLATCH PER MOUNTING INSTRUCTIONS.</li> <li>2. INSTALL CAM DISC ASSY. SECURE WITH SETSCREW.</li> </ol>	<p><b>STEP 3</b></p> <ol style="list-style-type: none"> <li>1. INSTALL ESCUTCHEON ASSY.</li> <li>2. USING 8-32 SCREWS W/LOCKWASHER, SECURE ESCUTCHEON ASSY. TO BINDER POST.</li> </ol> <p><b>IMPORTANT, TIGHTEN SCREWS SECURELY.</b></p>
<p><b>STEP 2</b></p> <ol style="list-style-type: none"> <li>1. INSTALL DEADLATCH PER MOUNTING INSTRUCTIONS.</li> <li>2. INSTALL CAM DISC ASSY. SECURE WITH SETSCREW.</li> </ol>	<p><b>STEP 3</b></p> <ol style="list-style-type: none"> <li>1. INSTALL ESCUTCHEON ASSY.</li> <li>2. USING 8-32 SCREWS W/LOCKWASHER, SECURE ESCUTCHEON ASSY. TO BINDER POST.</li> </ol> <p><b>IMPORTANT, TIGHTEN SCREWS SECURELY.</b></p>	<p><b>STEP 4</b></p> <ol style="list-style-type: none"> <li>1. INSTALL PADDLE ASSY. ALIGN DRIVE EARS ON PADDLE WITH SLOT IN DRIVE PLATE.</li> <li>2. INSTALL PIVOT PIN.</li> <li>3. INSTALL PIVOT PIN SET SCREW. TIGHTEN SET SCREW FLUSH WITH BOTTOM OF ESCUTCHEON.</li> </ol>

## INSTRUCTIONS FOR CHANGING HAND

1. FIND DESIRED CONFIGURATION.
2. REMOVE KEEPERS TO SEE LOCATION OF SPRINGS & DRIVER PLATE.
3. REVERSE SPRINGS & DRIVER PLATE IF NECESSARY.
4. REMOVE DRIVER SCREW IF NECESSARY, AND PLACE IN DESIRED LOCATION.
5. REPLACE KEEPERS.
6. CONFIGURE CAM DISC.

# CAM DISC HANDING

LOOKING AT THE EDGE OF THE DOOR DETERMINE ON WHICH SIDE THE HANDLE, OR OTHER OPERATOR IS TO BE INSTALLED.

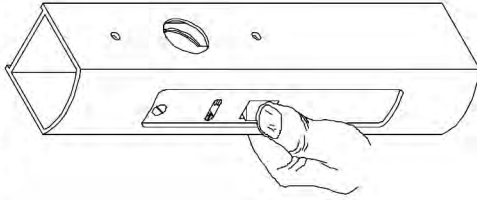

ON THIS SIDE

THE CAM DISC MUST BE HANDED AS SHOWN BELOW.



ON THIS SIDE


THE CAM DISC MUST BE HANDED AS SHOWN BELOW.



# INSTRUCTIONS FOR CHANGING HAND OF CAM DISC


STEP 1

REMOVE THE RETAINER CLIP




STEP 2

DO NOT REMOVE THE DRIVER PIECE.



PULL THE CAM PIVOT PIN OUT OF THE CAM DISC AS SHOWN.

STEP 3



TURN THE CAM OVER AND PUSH THE CAM PIVOT PIN THRU THE CAM AND INTO THE CAM DISC AS SHOWN.

STEP 4

SNAP THE RETAINER CLIP INTO THE GROOVE ON THE CAM PIVOT PIN.

